



Cartersville School System

KELLEY A. DIAL, *PRESIDENT*
TRAVIS POPHAM, *VICE PRESIDENT*
S. PAT BROADNAX, *SECRETARY*

FLOYD BRAID
TIM CHASON
CAROLYN JOHNSON
LOUISE PANTER

MARC R. FEUERBACH, Ed.D.
SUPERINTENDENT

KENNETH CLOUSE, Ed.S.
ASSISTANT SUPERINTENDENT

REQUEST FOR PROPOSAL

October 1, 2018

Dear Sir or Madam:

The Cartersville School System invites you to submit a proposal on the following items.

Installation of video cameras at Kids & Company Pre-K, Cartersville Primary, Cartersville Elementary and Cartersville Middle.

Return your sealed pricing bid clearly marked **on the outside of the envelope or package to:**

**Dr. Marc Feuerbach, Superintendent
Cartersville School System
RFP # 9000-1001-105 ENCLOSED
P.O. Box 3310, 15 Nelson Street
Cartersville, Georgia 30120**

no later than 2:00 p.m., Tuesday, October 30, 2018

The Cartersville School Board reserves the right to accept and/or reject any and all bids.

We invite your participation.

Respectfully,

Marc Feuerbach, Ed.D.
Superintendent

Enclosures

INSTRUCTION TO BIDDERS

1. Proposals are due no later than 2:00 PM., Tuesday, October 30, 2018, and shall be opened publicly at that time.
2. **Proposals must be submitted on the forms enclosed.** Bidders may attach other appropriate information to best evaluate the proposal.
3. Proposals must meet the requirements relating to any and all Georgia Department of Education guidelines.
4. There will be a mandatory pre-bid meeting will be held on Tuesday, October 16, 2018 @ 2:00 PM EST. at the Cartersville School System's Central Office located at 15 Nelson Street, Cartersville Georgia.
5. The Cartersville School Board reserves the right to accept or reject any and all proposals.
6. Work is to begin on November 13, 2018 and must be completed no later than November 30, 2018.
7. Payment will be made within 30 days of the completion of project.
8. Proposals will be evaluated on price, starting date and completion date.
9. Contractor must provide a copy of **Certificate of Liability Insurance, E-Verification number, Workers Compensation Insurance and a W-9 form.**
10. Contactor is responsible for confirming all measurements regarding cabling needed to complete the project and provide a fully operational system based on the requirements of the RFP.
13. Further information regarding the RFP can be obtained by email only:

Ken Paige
Director of Operations
Cartersville School System
kpaige@cartersvilleschools.org

PROPOSAL FORM

Please include this cover sheet as (page 1) of your proposal

Cartersville School System
P.O. Box 3310
15 Nelson Street
Cartersville, Georgia 30120

We have carefully examined and fully understand the Instructions to Bidders and other documents found in the specifications as prepared by you.

We propose to enter into a contract to furnish the materials and deliver services as specified at the price listed below. We also assure you that a company representative will be readily available to assist in reviewing the materials and services.

Total bid proposal price for Installation of video cameras at Kids & Company Pre-K, Cartersville Primary, Cartersville Elementary and Cartersville Middle

\$ _____

Name of Company

Signature of Company Representative Authorized to Submit this Proposal

Printed Name of Representative

Business Address/ Street, City, State, Zip Code

Phone Number

Fax Number

Email

Office use only

SPECIFICATIONS

KIDS & COMPANY PRE-K

- 375' GENERAL CABLE 7131802 YELLOW CAT6 PLENUM CABLE
- 6 PANDUIT NK688MYL CAT6 YELLOW JACK NET KEY
- 6 PANDUIT NK2BXIW-A 2 PORT BOX
- 1 PANDUIT CIDYL-C YELLOW PATCH PANEL TABS (100)
- 6 QUICKTRON 576-115-001 YELLOW CAT 6 PATCH CABLE
- 6 QUIKTRON 576-115-005 5' CAT 6 PATCH CABLE YELLOW
- 6 GEM BLN-PVRJ452 BALUN PAIR
- 6 DAHUA DH-PFM321D-US POWER ADAPTER
- MOUNTING HARDWARE (TIE WRAPS, SCREWS, ETC...)
- INSTALL 6 DATA DROPS FOR 6 CAMERAS
- TERMINATE, TEST, & LABEL
- INSTALL CONDUIT FOR EXTERIOR CAMERAS UNDER WALKWAY
- INSTALL POWER ADAPTERS FOR CAMERAS
- PROVIDE UPS
- INSTALL 6 CUSTOMER PROVIDED CAMERAS
- TEST & FOCUS CAMERAS

CARTERSVILLE PRIMARY

- 4,150' GENERAL CABLE 7131802 YELLOW CAT6 PLENUM CABLE
- 20 PANDUIT NK688MYL CAT6 YELLOW JACK NET KEY
- 20 PANDUIT NK2BXIW-A 2 PORT BOX
- 1 PANDUIT CIDYL-C YELLOW PATCH PANEL TABS (100)
- 20 QUICKTRON 576-115-001 YELLOW CAT 6 PATCH CABLE
- 20 QUIKTRON 576-115-005 5' CAT 6 PATCH CABLE YELLOW
- 22 GEM BLN-PVRJ452 BALUN PAIR
- 22 DAHUA DH-PFM321D-US POWER ADAPTER
- 50' 3/4" EMT CONDUIT
- 4 3/4" EMT COUPLING
- 1 3/4" EMT CONNECTOR
- 10 EMT 1B 3/4" MINERALAC STRAP
- MOUNTING HARDWARE (TIE WRAPS, SCREWS, ETC...)
- INSTALL 20 DATA DROPS FOR 22 CAMERAS
- TERMINATE, TEST, & LABEL
- INSTALL CONDUIT FOR EXTERIOR CAMERAS UNDER WALKWAY
- INSTALL POWER ADAPTERS FOR CAMERAS
- PROVIDE UPS
- INSTALL 22 CUSTOMER PROVIDED CAMERAS
- INCLUDE CORE LICENCES FOR CAMERAS/ENCODERS
- TEST & FOCUS CAMERAS


CARTERSVILLE ELEMENTARY

- 4,300' GENERAL CABLE 7131802 YELLOW CAT6 PLENUM CABLE
- 21 PANDUIT NK688MYL CAT6 YELLOW JACK NET KEY
- 21 PANDUIT NK2BXIW-A 2 PORT BOX
- 21 QUICKTRON 576-115-001 YELLOW CAT 6 PATCH CABLE
- 21 QUIKTRON 576-115-005 5' CAT 6 PATCH CABLE YELLOW
- 25 GEM BLN-PVRJ452 BALUN PAIR
- 25 DAHUA DH-PFM321D-US POWER ADAPTER
- 50' 3/4" EMT CONDUIT
- 4 3/4" EMT COUPLING
- 1 3/4" EMT CONNECTOR
- 10 EMT 1B 3/4" MINERALAC STRAP
- MOUNTING HARDWARE (TIE WRAPS, SCREWS, ETC...)
- INSTALL 21 DATA DROPS FOR 25 CAMERAS
- TERMINATE, TEST, & LABEL
- INSTALL CONDUIT FOR EXTERIOR CAMERAS UNDER WALKWAY
- INSTALL POWER ADAPTERS FOR CAMERAS
- PROVIDE UPS
- INSTALL 25 CUSTOMER PROVIDED CAMERAS
- TEST & FOCUS CAMERAS


CARTERSVILLE MIDDLE


- 3,250' GENERAL CABLE 7131802 YELLOW CAT6 PLENUM CABLE
- 16 PANDUIT NK688MYL CAT6 YELLOW JACK NET KEY
- 16 PANDUIT NK2BXIW-A 2 PORT BOX
- 16 QUICKTRON 576-115-001 YELLOW CAT 6 PATCH CABLE
- 16 QUIKTRON 576-115-005 5' CAT 6 PATCH CABLE YELLOW
- 22 GEM BLN-PVRJ452 BALUN PAIR
- 22 DAHUA DH-PFM321D-US POWER ADAPTER
- 50' 3/4" EMT CONDUIT
- 4 3/4" EMT COUPLING
- 1 3/4" EMT CONNECTOR
- 10 EMT 1B 3/4" MINERALAC STRAP
- MOUNTING HARDWARE (TIE WRAPS, SCREWS, ETC...)
- INSTALL 16 DATA DROPS FOR 22 CAMERAS
- TERMINATE, TEST, & LABEL
- INSTALL CONDUIT FOR EXTERIOR CAMERAS UNDER WALKWAY
- INSTALL POWER ADAPTERS FOR CAMERAS
- PROVIDE UPS
- INSTALL 22 CUSTOMER PROVIDED CAMERAS
- TEST & FOCUS CAMERAS

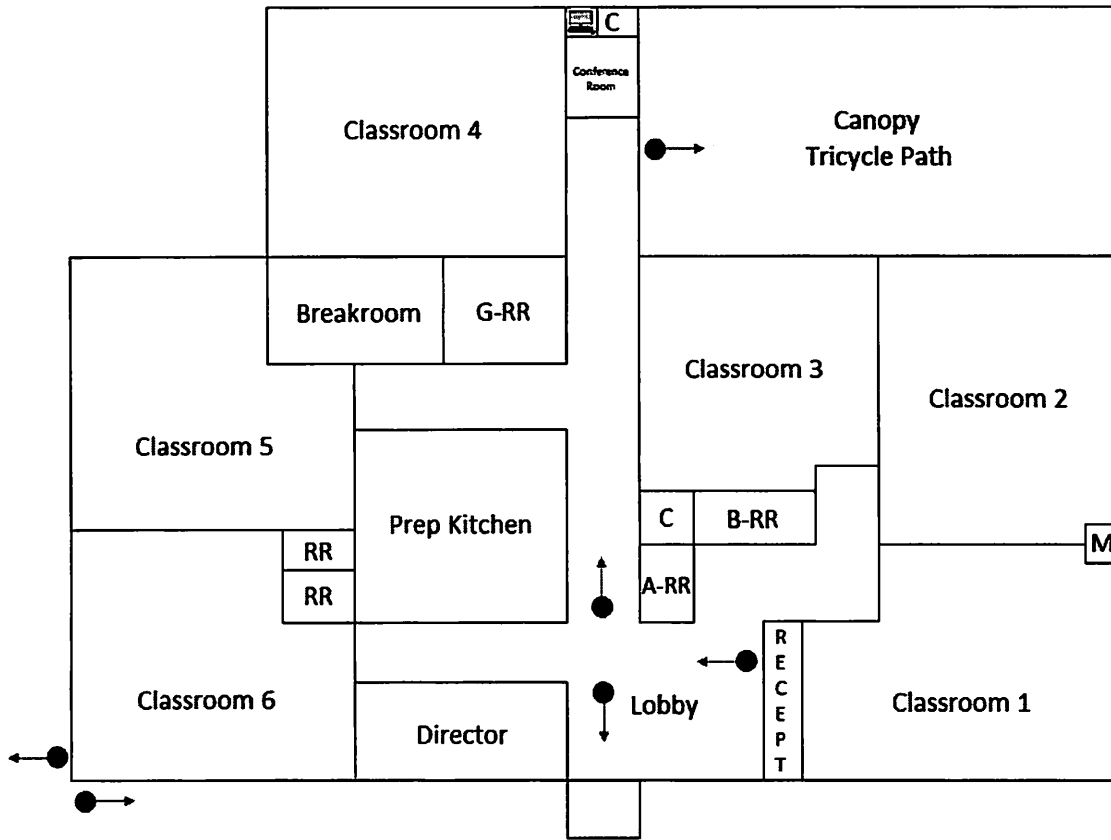

Owner will provide all cameras and encoders
Owner will provide patch panels
Owner will provide power to cameras where needed

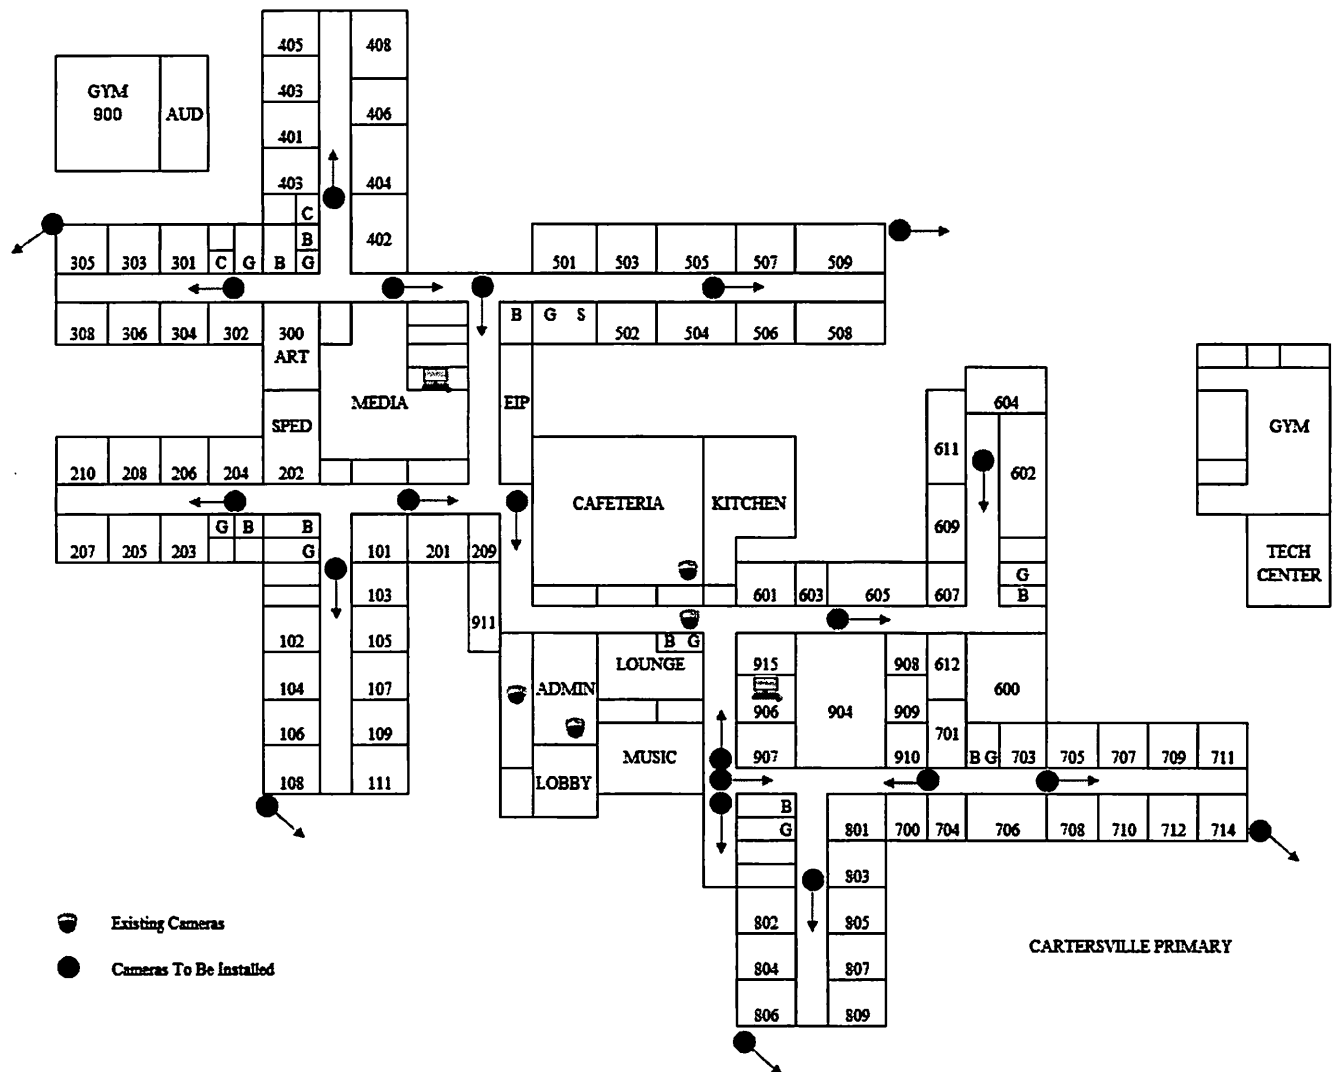

KIDS & COMPANY PRE-K

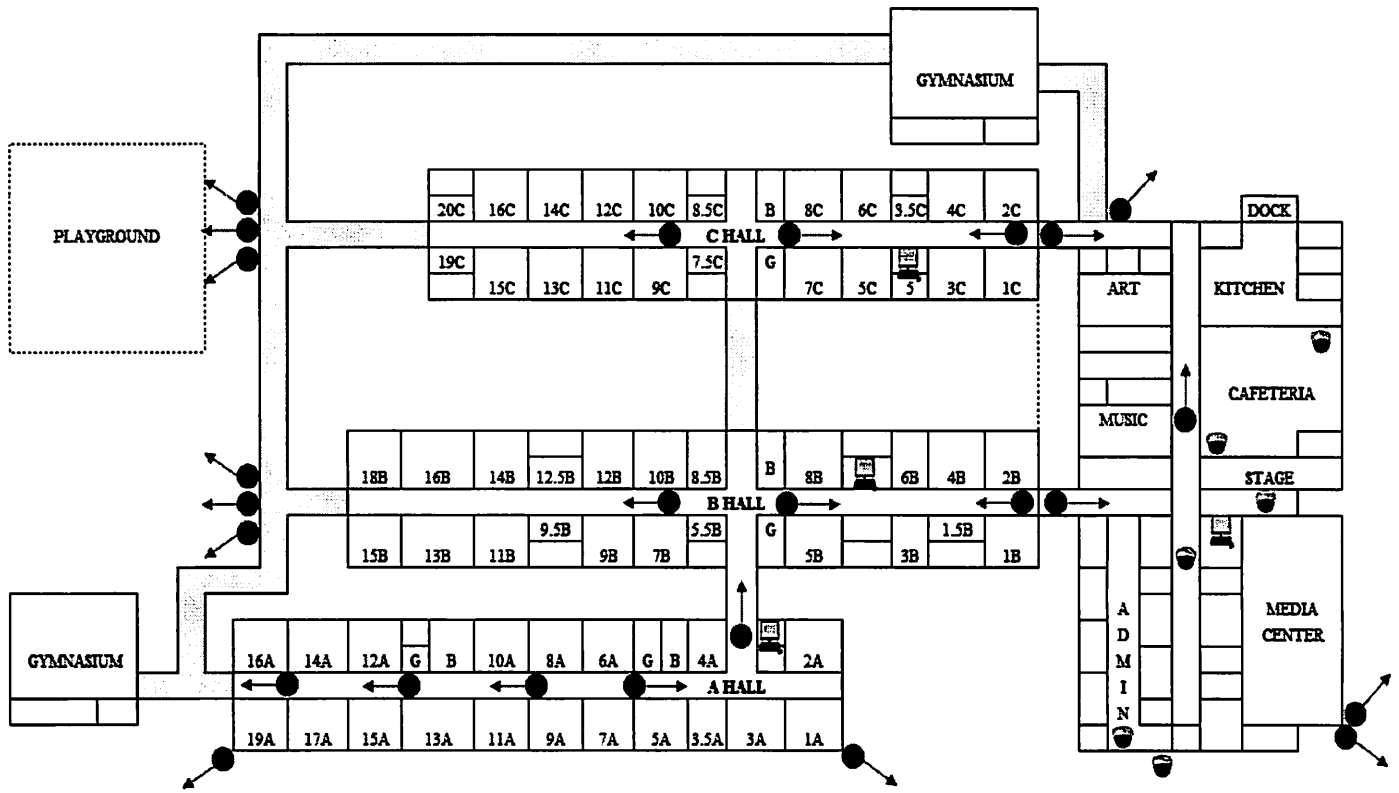



-  Existing Cameras
-  Cameras To Be Installed

CARTERSVILLE ELEMENTARY

